

DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R3W

SEC 21 | SEC 22


SEC 28 | SEC 27

U.S.B.&M.

J-13



LINE	BEARING	DISTANCE
L1	N 35°08'32" E	56.01'
L1	N 35°08'32" E	56.01'
L2	N 46°30'34" E	44.75'
L3	S 50°59'49" E	42.62'
L4	S 50°59'49" E	42.62'
L5	S 39°59'28" E	49.25'
L6	S 22°39'20" W	74.07'
L7	S 26°49'21" W	63.08'
L8	S 28°45'56" W	47.18'
L9	S 35°46'44" W	49.36'
L10	S 44°50'24" W	46.86'
L11	S 51°54'27" W	47.01'
L12	S 59°15'32" W	56.04'
L13	N 77°45'20" W	30.49'
L14	N 44°24'34" W	40.41'

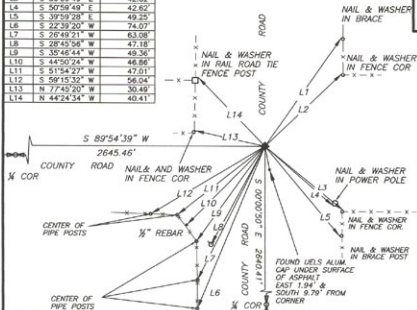

1"=30'

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A MONUMENT SPIKE AS PER PREVIOUS SURVEY AND ALSO FOUND A UELS ALUMINUM CAP WITH REBAR, 1.94' EAST AND 9.79' SOUTH OF POSITION OF MONUMENT THE SPIKE. AFTER DISCUSSING THE POSITION WITH MR. KAY AND MR. MARSHAL (UELS), IT WAS DETERMINED THAT THE MONUMENT SPIKE, WHICH HAD BEEN ESTABLISHED APPROXIMATELY 20 YEARS PRIOR TO THE ALUMINUM CAP LOCATION, WOULD BE HELD AS THE LOCATION OF THE SECTION CORNER.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET 2 1/2" ALUMINUM COUNTY MONUMENT IN CONCRETE, STAMPED:



REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

 Date 17 Dec '03

Jerry D. Allred, Professional Land Surveyor
 Certificate No. 148951
 Duchesne County Surveyor



SCND 18, DEC. 03